


Range: Core Matt Tile

Class: 23 / 33

Wear Layer: 0.55

Surface: Embossed

Construction: Modular Multi Layer Rigid Vinyl

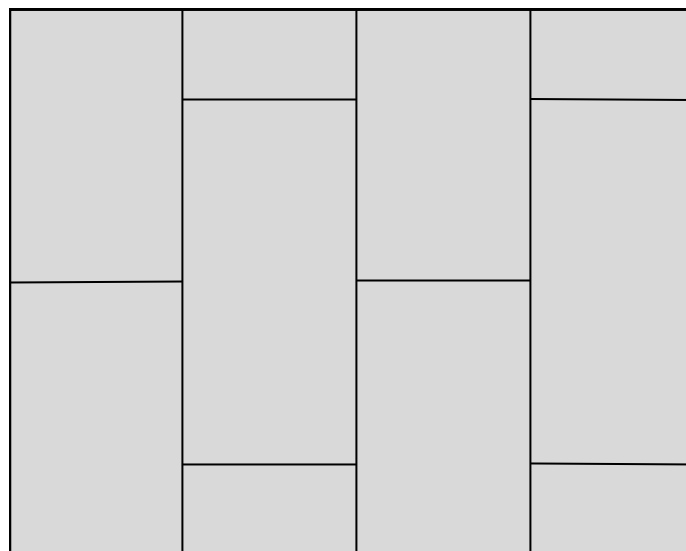

PRODUCT SPECIFICATIONS	STANDARD	TEST VALUE
Total thickness	EN ISO 24346	5,5mm (4,5 + 1 IXPE underlayment)
Wear layer	EN ISO 24340	0,55 mm
Classification	EN ISO 10874	Domestic: 23 Commercial: 33
Total weight	EN ISO 23997	9200 g/m ²
Dimensions	EN ISO 24342	305mm x 610mm 12 planks/box = 2.23m ² 44 boxes/pallet = 98.12m ²
Locking system	-	Unilin Click system
Bevelled edges	-	Yes

PRODUCT PERFORMANCES	STANDARD	TEST VALUE
Dimensional stability	EN ISO 23999	≤0,1%
Residual indentation	EN ISO 24343-1	≤ 0,10 mm
Impact sound reduction	EN ISO 717-2	ΔLw = 21 dB
Light fastness	EN ISO 105-B02	≥ 6
Slip resistance	EN 13893	DS
Resistance to chemicals	EN ISO 26987	Resistant
Thermal resistance	EN 12667	0,050 (m ² K)/W
Dimensional stability after exposure to heat	EN ISO 23999	≤0,1%
Fire resistance	EN 13501-1	Bfl-s1
Electrical properties	EN 1815	< 2 kv
Underfloor heating suitability	EN 12524	Suitable

Imported and distributed by Wood Innovations Ltd

ENVIRONMENT	STANDARD	TEST VALUE
VOC emission class (French regulation) - Indoor air quality	ISO 16000-9	A+
Floorscore VOC test - Indoor air quality	ISO 16000-9	Passed
Formaldehyde group	EN 717-1	E1



Imported and distributed by Wood Innovations Ltd